

# PyroUSB


## USB Configurable Infrared Temperature Sensors with 4-20 mA Output



- Temperature ranges from -40°C to 2000°C
- 2-wire 4-20 mA output
- Fully configurable via USB using Modbus protocol. Cable and software included
- Specialised models for measuring metals, high-temperature objects or glass surfaces
- General-purpose models for most other applications
- Peak and valley hold mode allows easy measurement of objects on conveyors
- Stainless steel housing, sealed to IP65
- Quick and easy installation

### CONNECTIONS

The sensor will operate with either the 4 to 20 mA cable connected, the USB cable connected, or both.

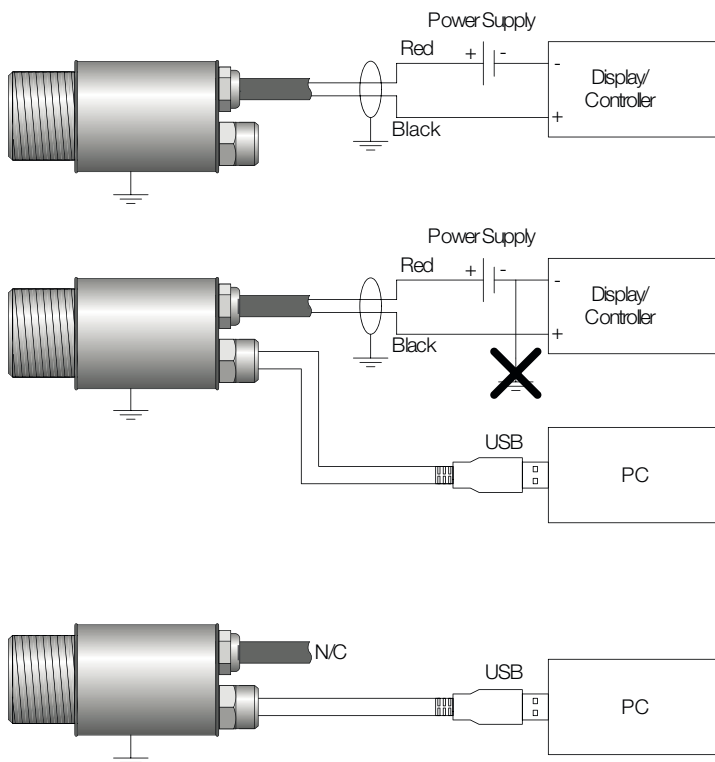

Note: The sensor must be grounded at only one point, either the cable shield or the sensor housing.

The PyroUSB Series measures temperatures from -40°C to 2000°C accurately and consistently, with an outstanding response time of 200 ms. The 4 to 20 mA output is compatible with almost any indicator, controller, recorder or data logger, without the need for special interfacing or signal conditioning.

A choice of measurement wavelengths is available to suit a range of applications.


**General-purpose** PUA8 (8-14  $\mu\text{m}$ ) models can measure from -40°C to 1000°C. They are suitable for measuring high-emissivity materials such as paper, thick plastics, food, pharmaceuticals, rubber, asphalt and painted surfaces. These models are capable of measuring very low temperatures, so they are ideal for sub-zero measurements in the food, logistics and storage industries.

**Short-wavelength** PUA2 (2.2  $\mu\text{m}$ ) models have a choice of temperature ranges from 45°C to 2000°C. They provide a more accurate reading when measuring low-emissivity materials such as many reflective metals. They are also capable of measuring through glass viewports.

**Glass** PUA5 (5  $\mu\text{m}$ ) models can measure from 200°C to 1650°C. They are filtered at a wavelength where glass is least reflective, making them an ideal pyrometer for glass surface temperature measurement.

All models have USB communications. A USB cable and Windows software is included. All data is transmitted via Modbus, so it is also easy to configure and read temperatures from the sensor using third-party software.

The USB cable has an IP65 connector at the sensor end. An IP65 cap protects the sensor when the USB cable is not connected.

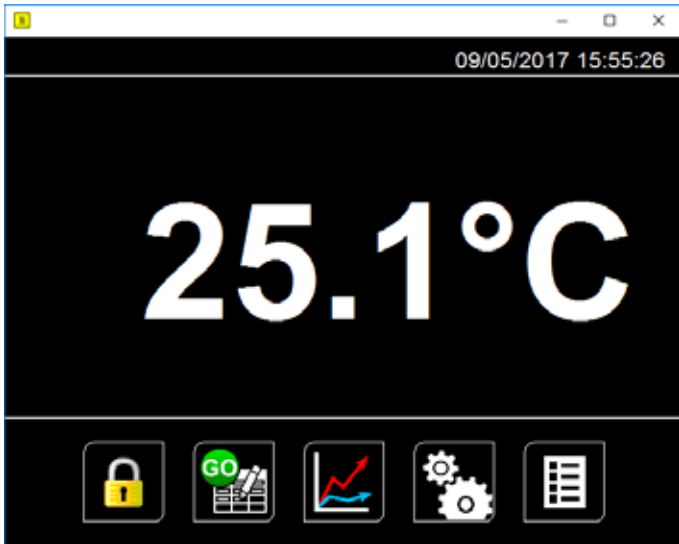



## SOFTWARE

It is simple, touch-friendly software, compatible with versions of Windows from Vista onwards and supplied with each sensor.


Alternatively, the sensor's Modbus protocol allows it to be used with other Modbus software.

## FEATURES

- Temperature display
- Scrolling temperature chart
- Data logging to comma-separated text file, compatible with Excel
- Sensor configuration:
  - Emissivity setting
  - Averaging
  - Peak/valley hold processing
  - Reflected energy compensation
  - 4-20 mA output temperature scale

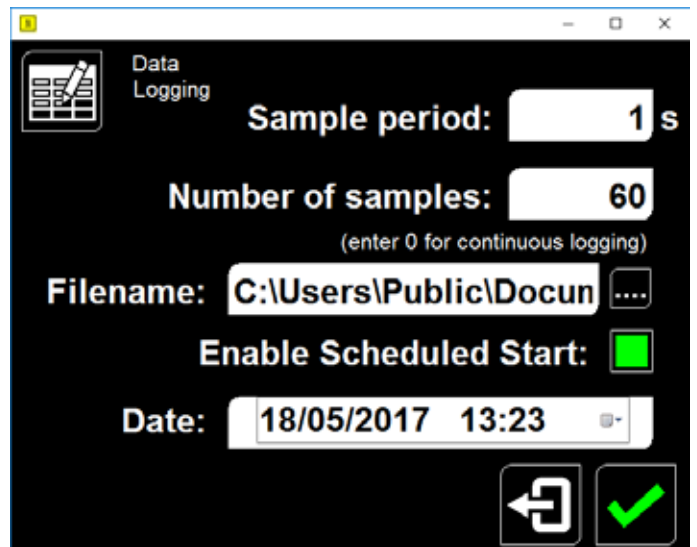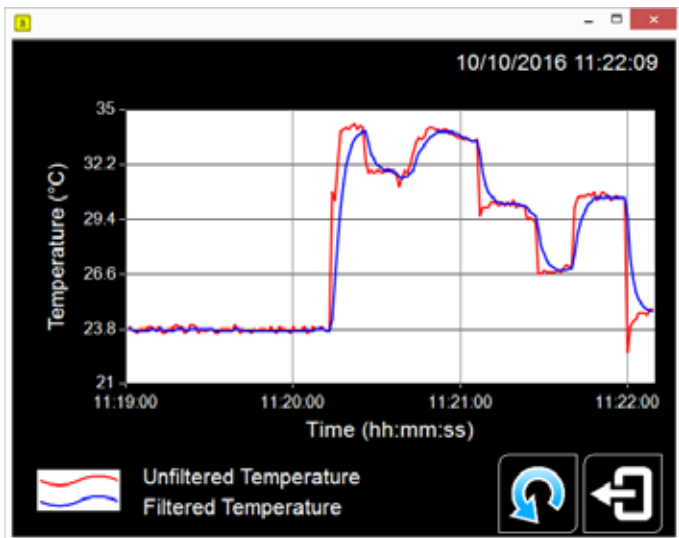


## DIMENSIONS

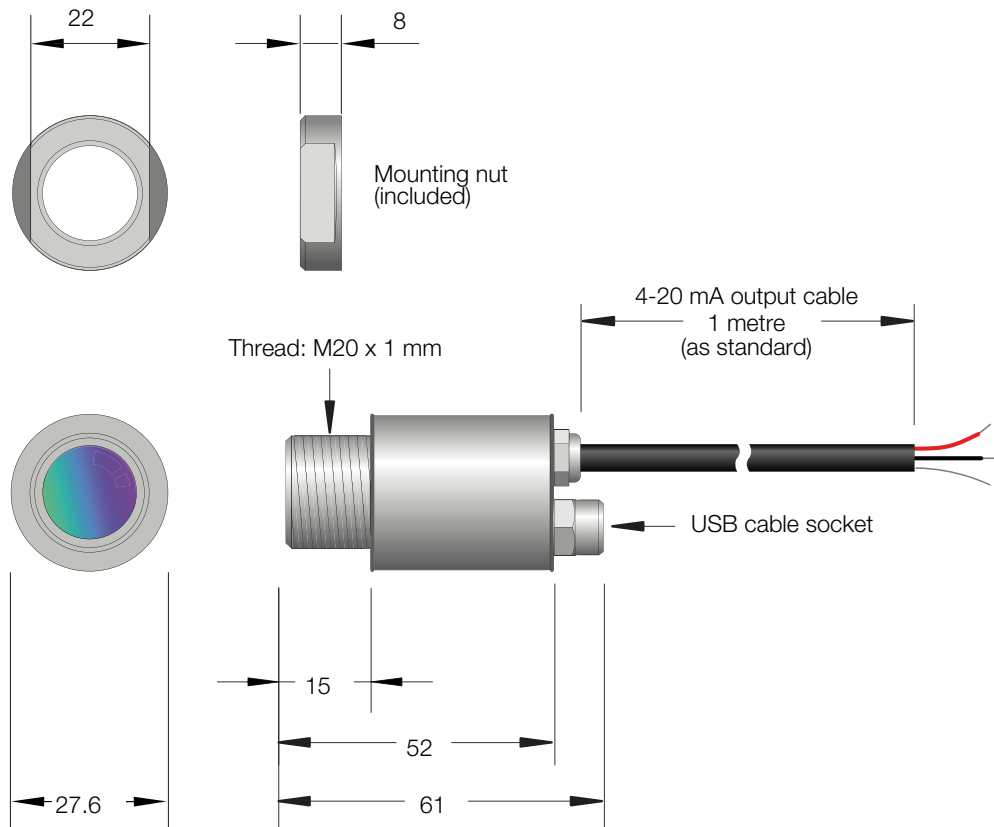


**OPTICS** Diameter of target spot measured versus distance from sensing head (90% energy)

**Optics (PUA2 and PUA5)**




251

**Optics (PUA8)**




301

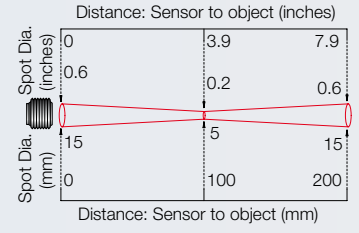


CF


**Optics (PUA2)**

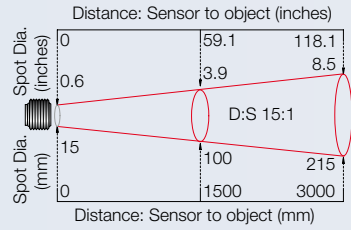

151



751

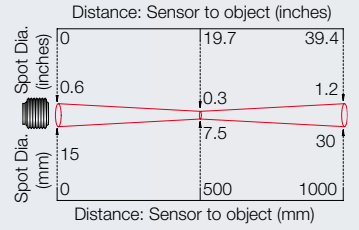

CF

**GENERAL SPECIFICATIONS**

Model	PUA2	PUA5	PUA8
<b>Spectral Response</b>	2.2 μm	5 μm	8 to 14 μm
<b>Application</b>	Ferrous metals and high-temperature targets	Glass	General purpose
<b>Temperature range</b>	Choice of ranges from 45°C to 2000°C	200°C to 1650°C	-40°C to 1000°C
<b>Response time</b>	200 ms		
<b>Output</b>	2-wire, 4-20 mA, linear with measured temperature		
<b>Communications</b>	USB 2.0 (removable USB cable and software included) using the Modbus protocol		
<b>Optics</b>	Choice of divergent or focused optics for small or large targets at short or long distances (see Optics)		
<b>Accuracy</b>	± 2°C or 1% of reading, whichever is greater	± 1°C or 1% of reading, whichever is greater	
<b>Repeatability</b>	± 0.5°C or 0.5% of reading, whichever is greater		
<b>Emissivity Setting</b>	0.1 to 1.0		
<b>Maximum Span (4-20 mA output)</b>	Full temperature range		
<b>Minimum Span (4-20 mA output)</b>	100°C		

**ELECTRICAL**

<b>Supply Voltage</b>	24 V DC (28 V DC max)
<b>Sensor Voltage (minimum)</b>	6 V DC
<b>Maximum Loop Impedance</b>	900 Ω @ 24 V DC


**MECHANICAL**

<b>Construction</b>	Stainless Steel
<b>Dimensions</b>	Ø 27.6 x length 61 mm including cable glands
<b>Thread mounting</b>	M20 x 1 mm pitch, length 15 mm
<b>4-20 mA Output Cable Length</b>	1 m (standard), up to 30 m (optional)
<b>Weight with 1 m Output Cable</b>	155 g
<b>USB Cable Length</b>	1.8 m

**ENVIRONMENTAL**

<b>Environmental Rating</b>	IP65
<b>Ambient (Operating) Temperature</b>	0°C to 70°C (cooled models are available for higher temperatures)
<b>Relative Humidity</b>	95% max. non-condensing

**MINIMUM MEASURABLE TEMPERATURE**  
(PUA2-151-LT ONLY)

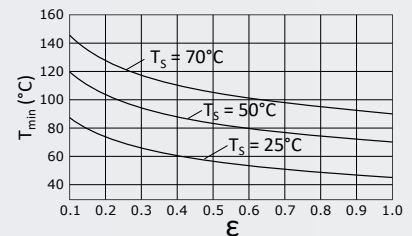

Graph showing the minimum measurable object temperature (T<sub>min</sub>), determined by surface emissivity (ε) and sensor temperature (T<sub>s</sub>).

## MODEL NUMBERS

Short Wavelength	<b>PUA2</b>	-	<b>251</b>	-	<b>MT</b>	-	<b>WJ</b>
Glass	<b>PUA5</b>	-	<b>251</b>	-	<b>GHT</b>	-	<b>WJ</b>
General Purpose	<b>PUA8</b>	-	<b>301</b>	-		-	<b>WJ</b>



### Cooling

**(blank)** Sensor without cooling  
**WJ** Air/water cooled jacket with air purge collar

### Temperature range

#### PUA2

**LT** 45°C to 300°C  
 (151 models only)

**PT** 100°C to 400°C  
 (151 models only)

**MT** 250°C to 1000°C  
**HT** 450°C to 2000°C

#### PUA5

**GHT** 200°C to 1650°C

#### PUA8

**(blank)** All models:  
 -40°C to 1000°C

### Field of view

#### PUA2

**151** 15:1 divergent optics (LT & PT models only)

**251** 25:1 divergent optics

**751** 75:1 divergent optics

**CF** Close-focus optics (focal spot size  
 7.5 mm at 500mm distance)

#### PUA5

**251** 25:1 divergent optics

#### PUA8

**301** 30:1 divergent optics

**CF** Close-focus optics (focal spot size  
 5 mm at 100mm distance)

### Spectral response

**PUA2** 2.2 µm, for measuring reflective metals  
 and high-temperature objects

**PUA5** 5 µm, for measuring glass surface temperature

**PUA8** 8 to 14 µm, general-purpose,  
 for most other applications

## ACCESSORIES



Laser Sighting Tool **LSTL**



Adjustable mounting  
 bracket **ABL**



Air/water cooled  
 housing **WJ**



Air purge **APL**



Dual laser  
 sighting bracket  
**DLSBFL/  
 DLSBAL**



Protective Window **PWL**

## ACCESSORIES ALSO AVAILABLE

Fixed mounting bracket **FBL**

Extended analogue output cable (30 m max):

- for PyroUSB models without cooling **PUACE**

- for PyroUSB WJ models **PUACEHT**

3-point calibration certificate **CALCERTA**